


DLX Manifold Injectors

The DLX series injectors are positive displacement injectors (PDI). These injectors are filled when the system is pressurized, and inject when the system pressure is relieved. This product is suitable for volumetric periodic lubrication systems with a working pressure of 1.75-2.5Mpa. These injectors deliver a fixed, predetermined quantity of lubricant to each lubrication point. The DLX series is available with 2, 3, 4 and 5 outlets. Discharge of each outlet can be freely selected within a specified range. An unused outlet may be blocked with a special plug. This product is widely used in lubrication systems for printing, plastics, packing and machine tools etc.

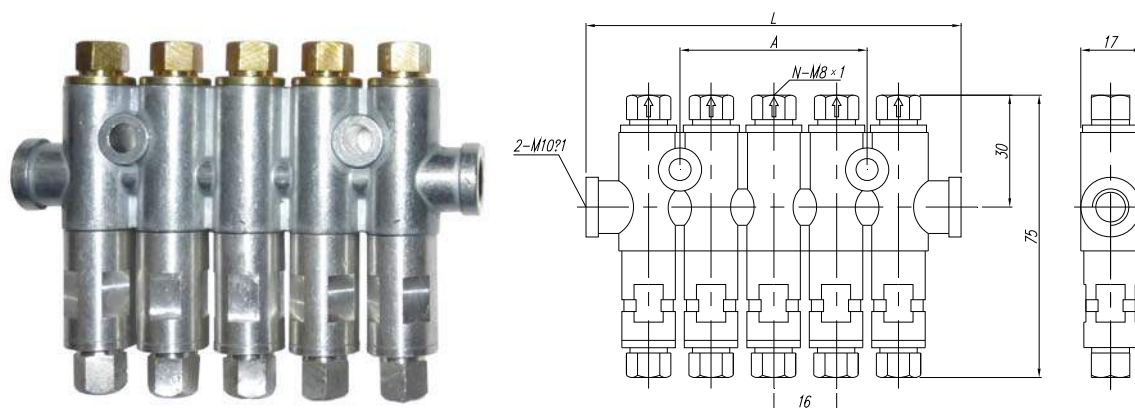

Model	P.N.	Number of outlets	Discharge (ml/cyc)
DLX	33000-XX	2	0.03/0.06/0.1/0.2/0.3/0.4/0.5
	33000-XXX	3	
	33000-XXXX	4	
	33000-XXXXX	5	
If product P.N. is 33000T-XXX etc., T indicates that adaptor, compression sleeve and bushing shall be provided at inlets and outlets.			

Discharge size code	A	B	C	D	E	F	G	0
Product printing mark	03	06	10	20	30	40	50	0
Discharge (ml/cyc)	0.03	0.06	0.1	0.2	0.3	0.4	0.5	0(Block)

For instance:

33000T-20/30/40/50-----33000 is product P.N., 20/30/40/50 is discharge indicating 0.2ml and 0.3ml and 0.4ml and 0.5ml from left to right.

T- adaptors and compression sleeve